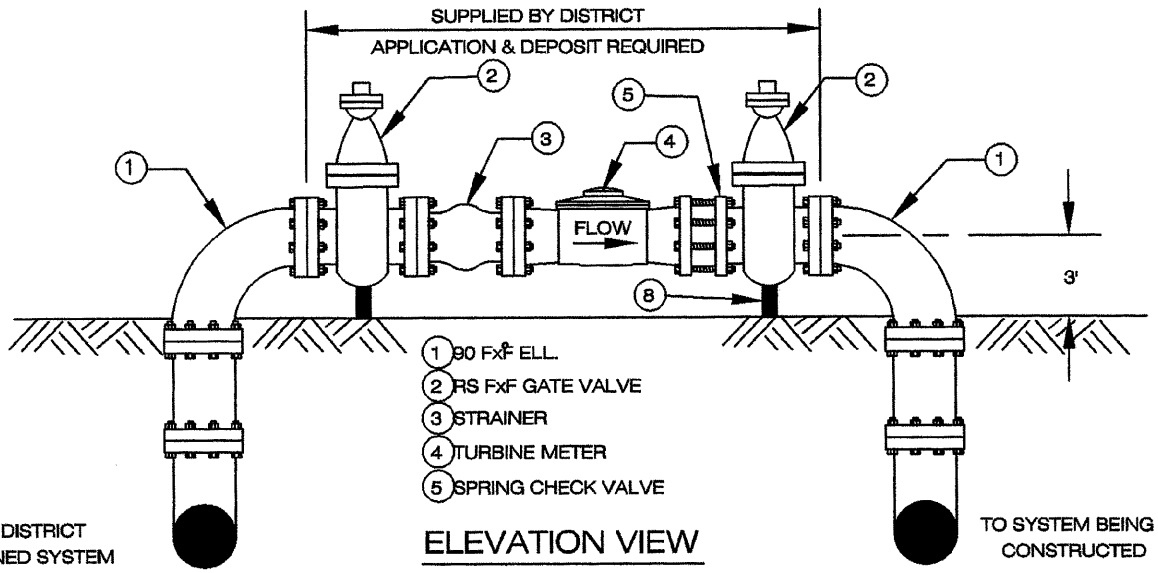

ELEVATION VIEW

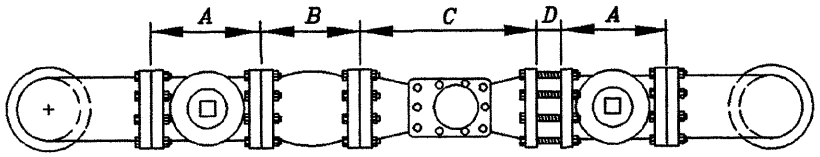

PLAN VIEW

	A	B	C	D
4" METER	9"	9"	14"	2 1/4"
6" METER	10 1/2"	9"	18"	2 3/4"

ESTIMATED 4" METER FLOW

CONTINUOUS FLOW: 15 TO 1000 GPM
INTERMITTENT FLOW: 1250 GPM MAX.

ESTIMATED 6" METER FLOW

CONTINUOUS FLOW: 30 TO 2000 GPM
INTERMITTENT FLOW: 2500 GPM MAX.

NOTES:

1 THE DISTRICT, UPON APPLICATION BY DEVELOPER WILL FURNISH, THE METER, SPRING CHECK VALVE, THE TWO GATE VALVES & STRAINER.

2 INSTALLATION SHALL BE BY THE DEVELOPER'S CONTRACTOR, INCLUDING DISTRICT FURNISHED MATERIALS IN NOTE 1.

3 LOCATION OF CONSTRUCTION METER(S) SHALL BE INDICATED ON THE IMPROVEMENT PLANS.

4 DISTRICT WILL NOTIFY DEVELOPER WHEN HIS CONTRACTOR CAN REMOVE THE CONSTRUCTION METER ASSEMBLY, & RETURN TO DISTRICT.

5 THE CONSTRUCTION METER ASSEMBLY MAY BE LOCATED WITHIN THE ROADWAY UPON APPROVAL OF THE PUBLIC WORKS DEPT. OF THE AGENCY HAVING JURISDICTION OF THE SUBDIVISION AND VISTA IRRIGATION DISTRICT.

6 PROTECTION POSTS ARE REQUIRED PER STD. DWG. 4-3 IF METER ASSEMBLY IS LOCATED IN ROADWAY.

7 SYMBOL ON PLANS: —SCM—

8 SUPPORT STAND

REVISIONS	APPROVED	DATE	VISTA IRRIGATION DISTRICT	PATH: (TOM) H:\STDDWGS\1-11.DWG
			SUBDIVISION CONSTRUCTION METER ASSEMBLY	JOHN AMODEO R. C. E. 31161 DATE 12/2/99
				STANDARD DRAWING 1-11
ACAD		6/96		